



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## DESCRIPTION

A premium flash mount exhaust fan cover for a 20"x20" drywall opening. This cover can also be used on a cold air return, and yields a 18.375"x18.375" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

## APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

## FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.375" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 Degree angled slots for directional venting and to hide a fan.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.

## SPECIFICATIONS

- Over 337.64 square inches (2178.31 square centimeters) of accessible area.
- Overall dimensions are 22.375" x 22.375" x 0.5" (568.3mm x 568.3mm x 12mm).
- Product weight is 3.6 pounds (1.64 kilograms)

For a complete list of options visit [www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

SKU: **BAC-EXHAUST-20**



## WALL AND CEILING EXHAUST FAN COVER

REMOVABLE & MAGNETIC



## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

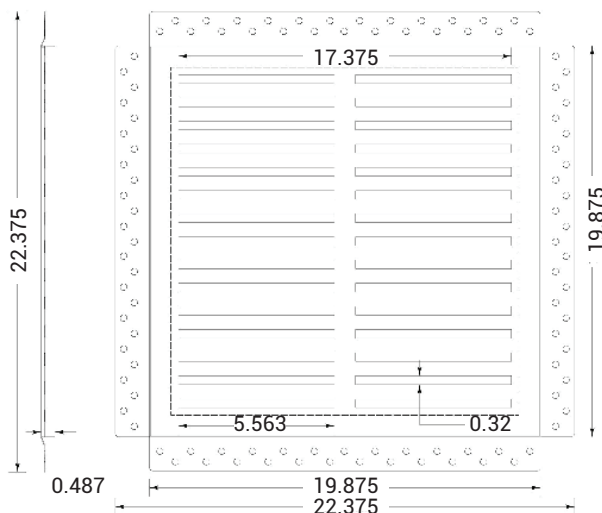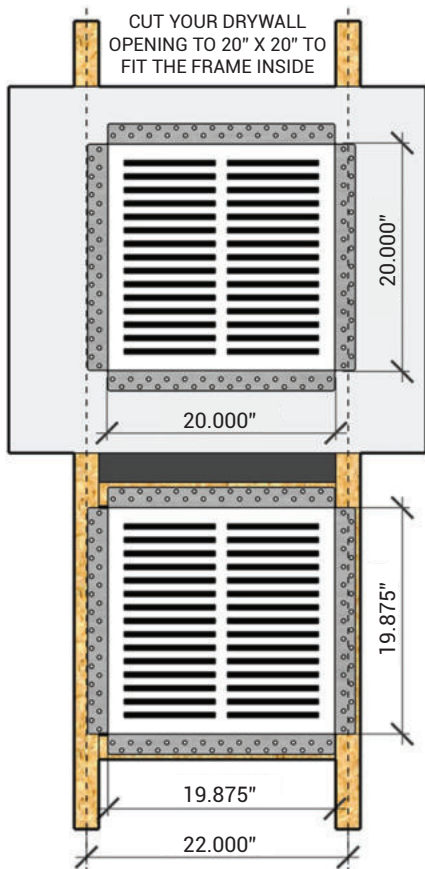

### Material Information:

**Raw Material:** Cement, fibres, quartz sand, non-hazardous fillers.

**Density:** 1.0 <math>< D \le 1.2</math> g/cm<sup>3</sup>

**Asbestos Content:** 100% asbestos-free

**Fire resistance:** Non-combustible edge and adjustable diffuser.

**Water Absorption:**  $\le 40\%$

**Resistant Bending Strength:**  $\le 10.5$  MPa dry

**Moisture Movement:** 0.25 %

**Freeze Thaw:** No distortion after 25 repeated cycles of freezing and thawing .

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021

385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)  
E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)