




Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAC-IG-CA24**

WALL AND CEILING COLD AIR RETURN COVER

PERMANENT

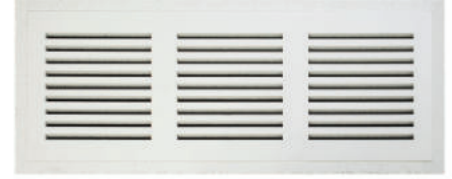

DESCRIPTION

A premium flush mount cold air return cover which replaces the cover for a 24"x6" opening. This cover fits into the drywall opening of 24.25"x10.25" and has a vented/slotted area of 20.5"x6".

APPLICATION

- Designed for 1/2" for a permanent installation.
- Suitable for low and high wall installations.
- Screws directly to your wall studs to allow it to be flush.
- Finish taping and seaming the perimeter edge with your drywall.
- (PRO TIP: cover the slots with painters tape to avoid drywall compound getting in them).
- Prime your wall and paint it to your wall colour.
- The cold air comes primed white and ready for your paint colour.

FEATURES

- Triple fibre reinforced cement board grill.
- Easy installation, primed and ready to paint.
- Machined outer edge to allow for screws, tape and drywall compound.
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.


SPECIFICATIONS

- Over 51 square inches (329 square centimeters) of open area.
- Slot Size: 5.91" x 0.32" (150mm x 8mm).
- 27 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 24" x 10" x 0.5" (609mm x 254mm x 12mm).
- Product weight is 3.75 pounds (1.7 kilograms)

DIMENSIONS AND APPEARANCE


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

CUT YOUR DRYWALL OPENING TO 24.25" x 10.25" TO FIT THE PRODUCT INSIDE.

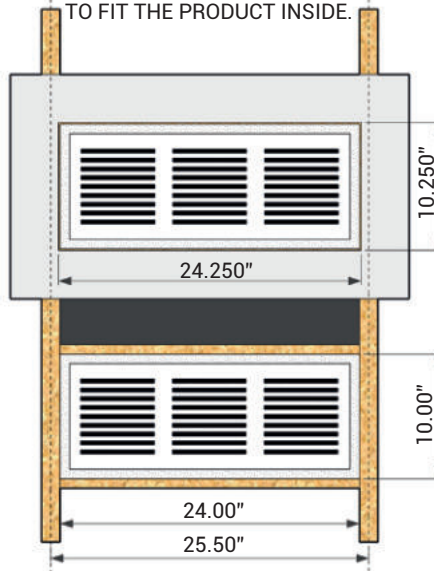

Material Information:

Raw Material: cement, fibres, quartz sand, non-hazardous fillers
 Density: $1.0 < D \leq 1.2 \text{ g/cm}^3$
 Asbestos Content: 100% asbestos-free
 Fire resistance: non-combustible
 Water Absorption: $\leq 40\%$
 Resistant Bending Strength: $\leq 10.5 \text{ MPa dry}$
 Moisture Movement: 0.25 %
 Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

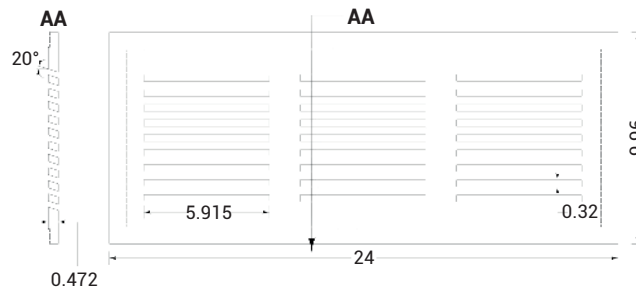

For a complete list of options visit www.BestAccessDoors.ca

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca

To view Pricing and Additional Product Info.

BAC-IG-CA24 PERMANENT WALL AND CEILING COLD AIR RETURN COVER

AIRFLOW DATA

			Core Velocity (FPM)	300	400	500	600	700	800	1000	1200	1400
Opening Width (in.)	Opening Height (in.)	Core Area (ft ²)	Core Velocity Pressure ("wc)	0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122
20.5	6	0.854	Flow (CFM)	174	232	290	348	406	464	581	697	813
			Static Pressure ("wc)	0.025	0.044	0.068	0.098	0.134	0.175	0.273	0.393	0.535

CUT YOUR DRYWALL OPENING TO 24.25" x 10.25" TO FIT THE PRODUCT INSIDE.

