



Quality Access Doors - FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## DESCRIPTION

A premium flush mount cold air return cover which replaces the cover for a 14"x6" opening. This cover fits into the drywall opening of 13.75"x8.5" and has a vented/slotted area of 12"x6"

## APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for low and high wall installation.
- Not suitable for ceiling install (call for ceiling option).
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

## FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Straight horizontal rectangular slots.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

## SPECIFICATIONS


- Over 32.63 square inches (210.5 square centimeters) of open area.
- Slot Size: 0.32" x 5.665" (8mm x 143mm).
- 18 straight horizontal slots.
- Overall dimensions are 16" x 10.5" x 0.5" (406mm x 266mm x 12mm).
- Product weight is 1.54 pounds (0.69 kilogram)

For a complete list of options visit [www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

SKU: **BAC-IG-MAG-C14X6**



# WALL COLD AIR RETURN COVER

REMOVABLE & MAGNETIC

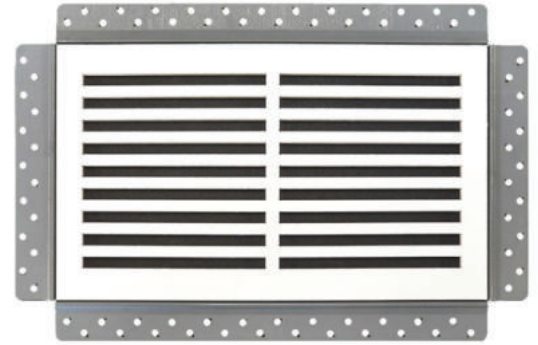

## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

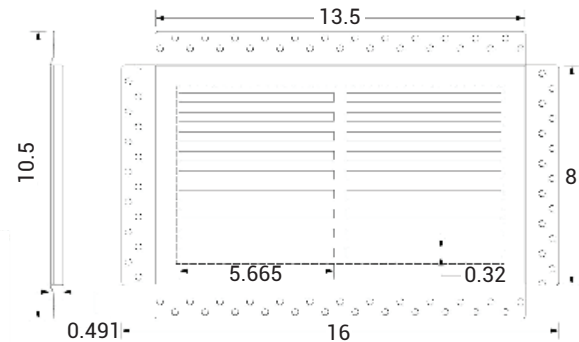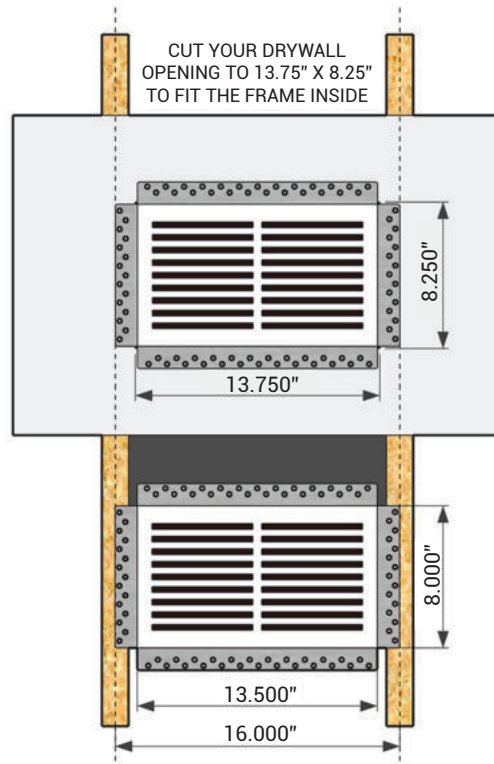

### MATERIAL INFORMATION:

**Raw Material:** Cement, fibres, quartz sand, non-hazardous fillers.  
**Density:**  $1.0 < D \leq 1.2 \text{ g/cm}^3$   
**Asbestos Content:** 100% asbestos-free  
**Fire resistance:** Non-combustible edge and adjustable diffuser.  
**Water Absorption:**  $\leq 40\%$   
**Resistant Bending Strength:**  $\leq 10.5 \text{ MPa}$  dry  
**Moisture Movement:**  $0.25 \%$   
**Freeze Thaw:** No distortion after 25 repeated cycles of freezing and thawing.

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:  
1-800-483-0823

FAX:  
1-888-828-6021

385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)