



# SUBMITTAL/TECHNICAL DATA SHEET

## DESCRIPTION

Clean and classic, featuring a completely removable front that utilizes magnetic technology. The Envisivent Removable Air Return Vent creates a smooth design for a more contemporary aesthetic, without the bulk of plastic or metal grills. Meant to replace a vent cover for a 24" x 14" duct opening (if applicable) or wall cavity and fits into a 26" x 16" drywall opening.

## APPLICATION

- Designed to be installed with 1/2" or 5/8" thick drywall
- Install anywhere on a wall where there are duct openings (if applicable)/or wall cavity both high (towards the ceiling) or low (towards the floor)

## FEATURES

- Magnetic Removable Impact Resistant Triple Fibre Reinforced Cement Board Vent Cover
- Primed vent cover ready to accept paint
- 24 gauge galvanized satin coat steel frame
- 4 magnetic tabs on Vent Cover for easy removal
- Made of non-flammable materials
- Moisture, mold, and water resistant

## SPECIFICATIONS

- Removable Flush Mount Air Return Vent for duct opening size 24" x 14" (if applicable)/or wall cavity
- Fits into a drywall opening of 26" x 16"
- Overall Dimensions: 28.375" x 18.375" x 0.5"
- Vent Cover Dimensions: 15.875" x 25.875"
- Vented Opening Dimensions: 23.751" x 13.749"
- Each slot size is 7" x 0.32"
- 60 straight horizontal vent slots
- Over 124 square inches (799.998 square cm) of open vent area

For a complete list of options visit [www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)

SKU: **BAG-IG-MAG-C24X14**

## ENVISIVENT REMOVABLE FLUSH MOUNT AIR RETURN VENT



## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

### MATERIAL INFORMATION:

Raw Material: Cement, fibres, quartz sand, non-hazardous fillers.

Density:  $1.0 < D \leq 1.2 \text{ g/cm}^3$

Asbestos Content: 100% asbestos-free

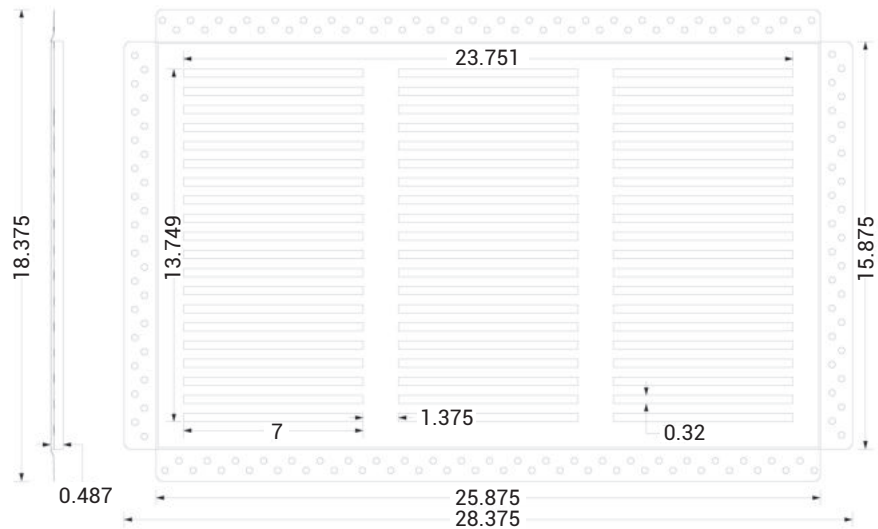
Fire resistance: Non-combustible edge and adjustable diffuser.

Water Absorption:  $\leq 40\%$

Resistant Bending Strength:  $\leq 10.5 \text{ MPa dry}$



Moisture Movement: 0.25 %

Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .



## PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

To view Pricing and Additional Product Info.



TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.BestAccessDoors.ca](http://www.BestAccessDoors.ca)  
E-MAIL:  
[info@bestaccessdoors.ca](mailto:info@bestaccessdoors.ca)