

Quality Access Doors- FAST!

## DESCRIPTION

Sleek and timeless, the Envisivent Removable Air Return Vent creates a modern touch with its fully detachable front, made easy by magnetic technology. This design innovation ensures a seamless appearance, free from the bulk of traditional plastic covers or the distraction of visible screws.

## APPLICATION

• Designed to be installed with 1/2" or 5/8" thick drywall. • Install anywhere on a wall where there are

 Install anywhere on a wall where there are duct openings (if applicable)/or wall cavity both high (towards the ceiling) or low (towards the floor).

## FEATURES

- Magnetic Removable Impact Resistant Triple Fibre Reinforced Cement Board Vent Cover
- Primed vent cover ready to accept paint
  24 gauge galvanized satin coat steel
- frame • 4 magnetic tabs on Vent Cover for easy
- removal
  <u>• Made of</u> non-flammable materials
- Moisture, mold, and water resistant

## SPECIFICATIONS

- Removable Flush Mount Air Return Vent Cover for duct opening size 30" x 14" (if applicable)/or wall cavity
- Fits into a drywall opening of 32" x 16"
  Overall Dimensions: 18.375" x 34.375" x
- Overall Dimensions: 18.375" X 34.375" X 0.5"
- Vent Cover Dimensions: 15.875" x 31.875"
- Vented Opening Dimensions: 30" x 14"
- Each slot size is 6.406" x 0.32"
- 80 straight horizontal vent slots
   Over 155 equare inches (000 00 c)
- Over 155 square inches (999.99 square cm) of open vent area

### For a complete list of options visit www.BestAccessDoors.ca



To view Pricing and Additional Product Info.

## SUBMITTAL/TECHNICAL DATA SHEET

# SKU: **BAC-IG-MAG-C30X14** Removable Mud-In Flush Mount Air Return

	-		
-	100		
-			
-			_
-			
		100	_
10.0	-	100	_
4			


### DIMENSIONS AND APPEARANCE

### >> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

#### Raw Material: Cement, fibres, quartz sand, nonhazardous fillers Density: 1.0<D ≤1.2 g/cm3 Asbestos Content: 100% asbestos-free Fire resistance: non-combustible Water Absorption: ≤40% Resistant Bending Strength: ≤10.5 MPa dry Moisture Movement: 0.25 % Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing.

**MATERIAL INFORMATION:** 

		-
 -		
		-
-	-	10

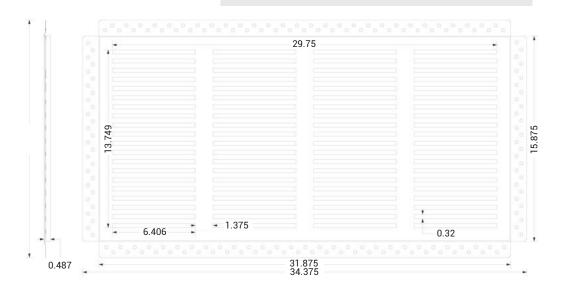

PROJECT DATA			Custom Sizes Available - Fast!				
	PROJECT NAME :	QTY	w	Н	OPTIONS		
	ARCHITECT :						
	DEALER :						
	CONTRACTOR :						
	LOCATION :	SPECIAL INSTRUCTIONS :					
	DATE :						
1	TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)					
	LOCATION : DATE :	SUBMITTAL APPROVAL :					





385 WILSON STREET EAST, SUITE 302 ANCASTER, ON, L9G 2C1 CANADA WEBSITE: www.Best

www.BestAccessDoors.ca

