

APPLICATION

- Designed to be installed with 1/2" or 5/8" thick drywall
- Ceiling and Wall Installations

FEATURES

- · Impact resistant Triple Fibre Reinforced Cement Board
- Easy installation
- Primed vent ready to accept paint Magnetic Removable Exhaust Fan Cover
- 4 Rare Earth Magnets 1/4" diameter x 1/16" thick
- Machine beveled outer edges to allow for air nails or screws, joint tape, and drywall compound
- Rectangular straight vent slots
- Moisture, mold, and water resistant 24 gauge galvanized satin coat steel
- frame complete with a beaded edge and adjustable steel damper.

SPECIFICATIONS

- · Removable Flush Mount Ceiling/Wall Air Supply Vent for drywall opening size 5"x5" Overall dimensions: 7.5" x " x 7.5" x 0.5"
- Vented Opening Dimensions: 3" x 3"
 Each slot size is 3.75" x 0.32"
- 5 straight horizontal or vertical slots
- Over 5 square inches (38.71 square cm) of open vent area





To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: BAC-IG-MAG-S5X5 **VABLE FLUSH** Y VENT SUPP




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

MATERIAL INFORMATION:

Raw Material: cement, fibres, quartz sand, non-hazardous fillers. Density: 1.0< D ≤1.2 g/cm3 Asbestos Content: 100% asbestos-free Fire resistance: non-combustible Water Absorption: ≤40% Resistant Bending Strength: ≤10.5 MPa dry Moisture Movement: 0.25 % Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing



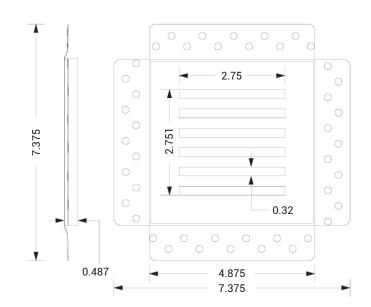

PROJECT DATA

PROJECT NAME :	QTY	w	н	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			





385 WILSON STREET EAST, **SUITE 302** ANCASTER, ON, L9G 2C1 CANADA

WEBSITE:

Custom Sizes Available - Fast!

www.BestAccessDoors.ca

