




Quality Access Doors - FAST!

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAG-IG-MAG-S6X10**

REMOVABLE WALL AND CEILING SUPPLY VENT

6" X 10" INVISAGRILLE

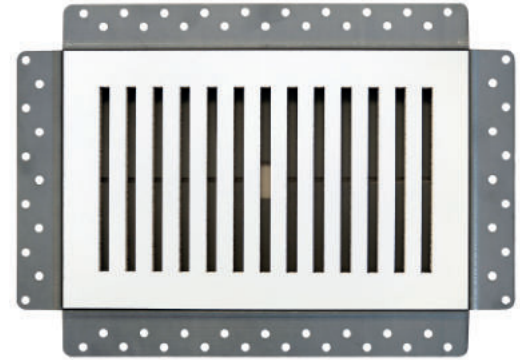

DESCRIPTION

A premium flush mount supply vent cover for a 6"x10" duct. Complete with diffuser flaps to control your air flow, this cover fits into the drywall opening of 7"x11" and has a vented/slotted area of 5"x9".

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Rectangular straight vent slots.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.


SPECIFICATIONS

- Over 16 square inches (103.2 square centimeters) of open area.
- Slot Size: 0.25" x 4.96" (6.35mm x 125.98mm).
- 13 rectangular straight vertical slots.
- Overall dimensions are 13.5" x 9.5" x 0.5" (343mm x 241.3mm x 12mm).
- Product weight is 1.9 pounds (0.86 kilograms)

DIMENSIONS AND APPEARANCE


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

CUT YOUR DRYWALL OPENING TO 11.25" X 7.25" TO FIT THE FRAME INSIDE. CENTER OVER 6x10 BOOT.

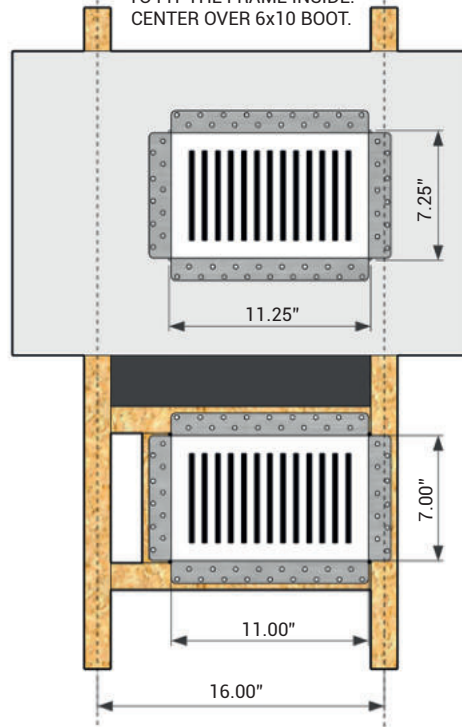

MATERIAL INFORMATION:

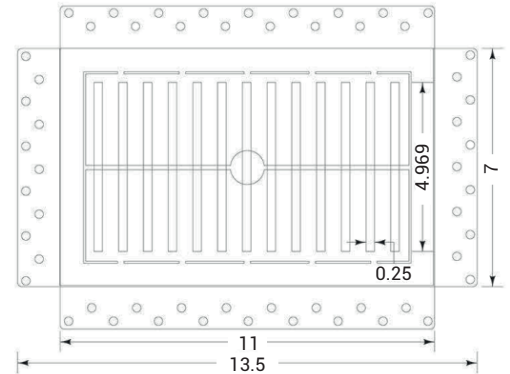

Raw Material: cement, fibres, quartz sand, non-hazardous fillers.
 Density: $1.0 < D \leq 1.2 \text{ g/cm}^3$
 Asbestos Content: 100% asbestos-free
 Fire resistance: non-combustible
 Water Absorption: $\leq 40\%$
 Resistant Bending Strength: $\leq 10.5 \text{ MPa dry}$
 Moisture Movement: 0.25 %
 Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .



For a complete list of options visit www.BestAccessDoors.ca

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

To view Pricing and Additional Product Info.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA




WEBSITE:
www.BestAccessDoors.ca
E-MAIL:
info@bestaccessdoors.ca

BAC-IG- MAG-S6X10

6" X 10" INVISAGRILLE REMOVABLE WALL AND CEILING SUPPLY VENT

AIRFLOW DATA

			Core Velocity (FPM)		300	400	500	600	700	800	1000	1200	1400
Opening Width (in.)	Opening Height (in.)	Core Area (ft ²)	Core Velocity Pressure ("wc)		0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122
9	5	0.3125	Flow (CFM)		63	85	106	127	148	169	212	254	296
			Static Pressure ("wc)		0.016	0.029	0.045	0.065	0.088	0.115	0.180	0.259	0.352
			Throw (ft) (150 100 50)		3 4 8	3 5 10	4 6 13	5 8 15	6 9 18	7 10 20	13 25	10 15 30	12 18 35

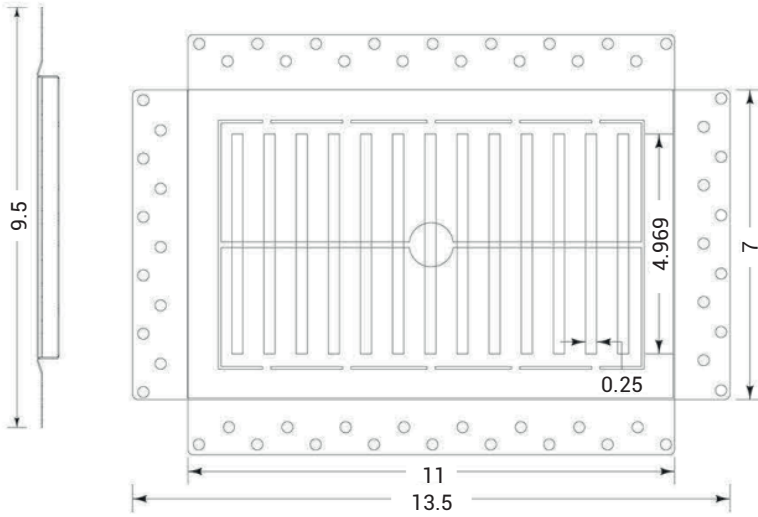

CUT YOUR DRYWALL OPENING TO 11.25" X 7.25"
TO FIT THE FRAME INSIDE.
CENTER OVER 6x10 BOOT.

