

DESCRIPTION

A premium flush mount access panel cover for a 10"x10" drywall opening. This cover can also be used on a wall or ceiling and yields a 8.125"x8.125" accessible area.

APPLICATION

- Designed for 1/2" and 5/8" thick drywall. - Suitable for both wall and ceiling installation.

 Screws on to the face of your drywall.
Once finished seaming over the flange, the product is ready to be primed and painted

■your wall colour. The inserts comes primed white and ready your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board cover.

- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.

- 4 rare earth magnets (0.250"diametre x 0.060" thick).

- Easy installation, primed and ready to paint.

- Fire Rated, non-flammable.

- Impact Resistant. - Moisture and Water Resistant, Mold

- Moisture Resistant.

- Eco- Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS

- Over 66 square inches (425.8 square

centimeters) of accessible area. - Overall dimensions are 12.125" x 12.125"

x 0.5" (307.9mm x 307.9mm x 12mm).

- Product weight is 1.98 pounds (0.89 kilograms)

For a complete list of options visit www.BestAccessDoors.ca




To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BAC-IG10 Removable flush Access Panel Cover** Magnetic

DIMENSIONS AND APPEARANCE

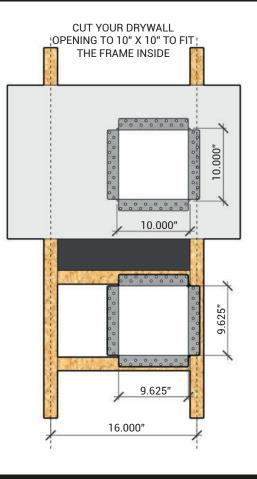

PROJECT DATA


PROJECT NAME :	QTY	w	н	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			





385 WILSON STREET EAST, SUITE 302 ANCASTER, ON, L9G 2C1 CANADA

WEBSITE: www.BestAccessDoors.ca



>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

9.625

12 125

MATERIAL INFORMATION:

0.487 |-

Raw Material: Cement, fibres, quartz sand, non- hazardous fillers. Density: 1.0<D ≤ 1.2 g/cm3 Asbestos Content: 100% asbestos-free Fire resistance: Non-combustible edge and adjustable diffuser. Water Absorption: ≤40% Resistant Bending Strength: ≤10.5 MPa dry Moisture Movement: 0.25 % Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

Custom Sizes Available - Fast!