

DESCRIPTION

A premium flush mount access panel cover for a 14"x14" drywall opening. This cover can also be used on a wall or ceiling and yields a 12.375"x12.375" accessible area.

APPLICATION

- Designed for 1/2" and 5/8" thick drywall. - Suitable for both wall and ceiling installation.

 Screws on to the face of your drywall.
Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.

 The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board cover.

- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.

- 4 rare earth magnets (0.375"diametre x 0.060" thick).

- Easy installation, primed and ready to paint.

- 20 Degree angled slots for directional venting and to hide a fan.

- Fire Rated, non-flammable. - Impact Resistant.

- Impact Resistant. - Moisture and Water Resistant, Mold

Resistant.

- Eco- Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS

- Over 153.14 square inches (988 square centimeters) of accessible area.

- Overall dimensions are 16.375" x 16.375" x 0.5" (415.9mm x 415.9mm x 12mm).
- x 0.5" (415.9mm x 415.9mm x 12mm). - Product weight is 3.6 pounds (1.64

kilograms)

For a complete list of options visit www.BestAccessDoors.ca




To view Pricing and Additional Product Info.



SKU: **BAC-IG14 Removable flush Access Panel Cover** Magnetic

DIMENSIONS AND APPEARANCE

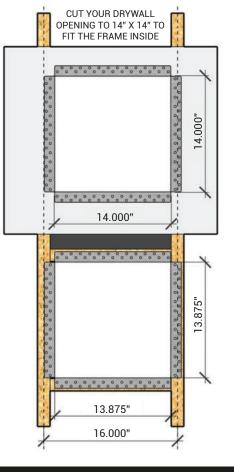

PROJECT DATA

PROJECT NAME :	QTY	W	Н	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			






385 WILSON STREET EAST, SUITE 302 ANCASTER, ON, L9G 2C1 CANADA

WEBSITE: www.BestAccessDoors.ca



>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<



Material Information:

Raw Material: Cement, fibres, quartz sand, non- hazardous fillers. Density: 1.0<D ≤ 1.2 g/cm3 Asbestos Content: 100% asbestos-free Fire resistance: Non-combustible edge and adjustable diffuser. Water Absorption: ≤40% Resistant Bending Strength: ≤10.5 MPa dry Moisture Movement: 0.25 % Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

Custom Sizes Available - Fast!